| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | |

Awal 14-3-N

10-23-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: DeRam H.P. 450 HP Volts: R.P.M.: Serial # C109015

Pram: Type: Pump: Type Oil Lube:

| | |
|---|---|
| Date: | |
| Standing Water | 275' |
| Draw Down | 33 |
| Pumping Level | 308' |
| Lift Above Discharge | 23.1 |
| Total Lift | 331.1 |
| G.P.M. | 2312 |
| GPM/FT | 72.48 |
| AC Ft. In. 24 Hrs. | 10.57 |
| HP Input RPM | 1297 |
| KW Input | |
| KW Hours Per AC/Ft. | |
| HP Per Cost Per AC/Ft. | |

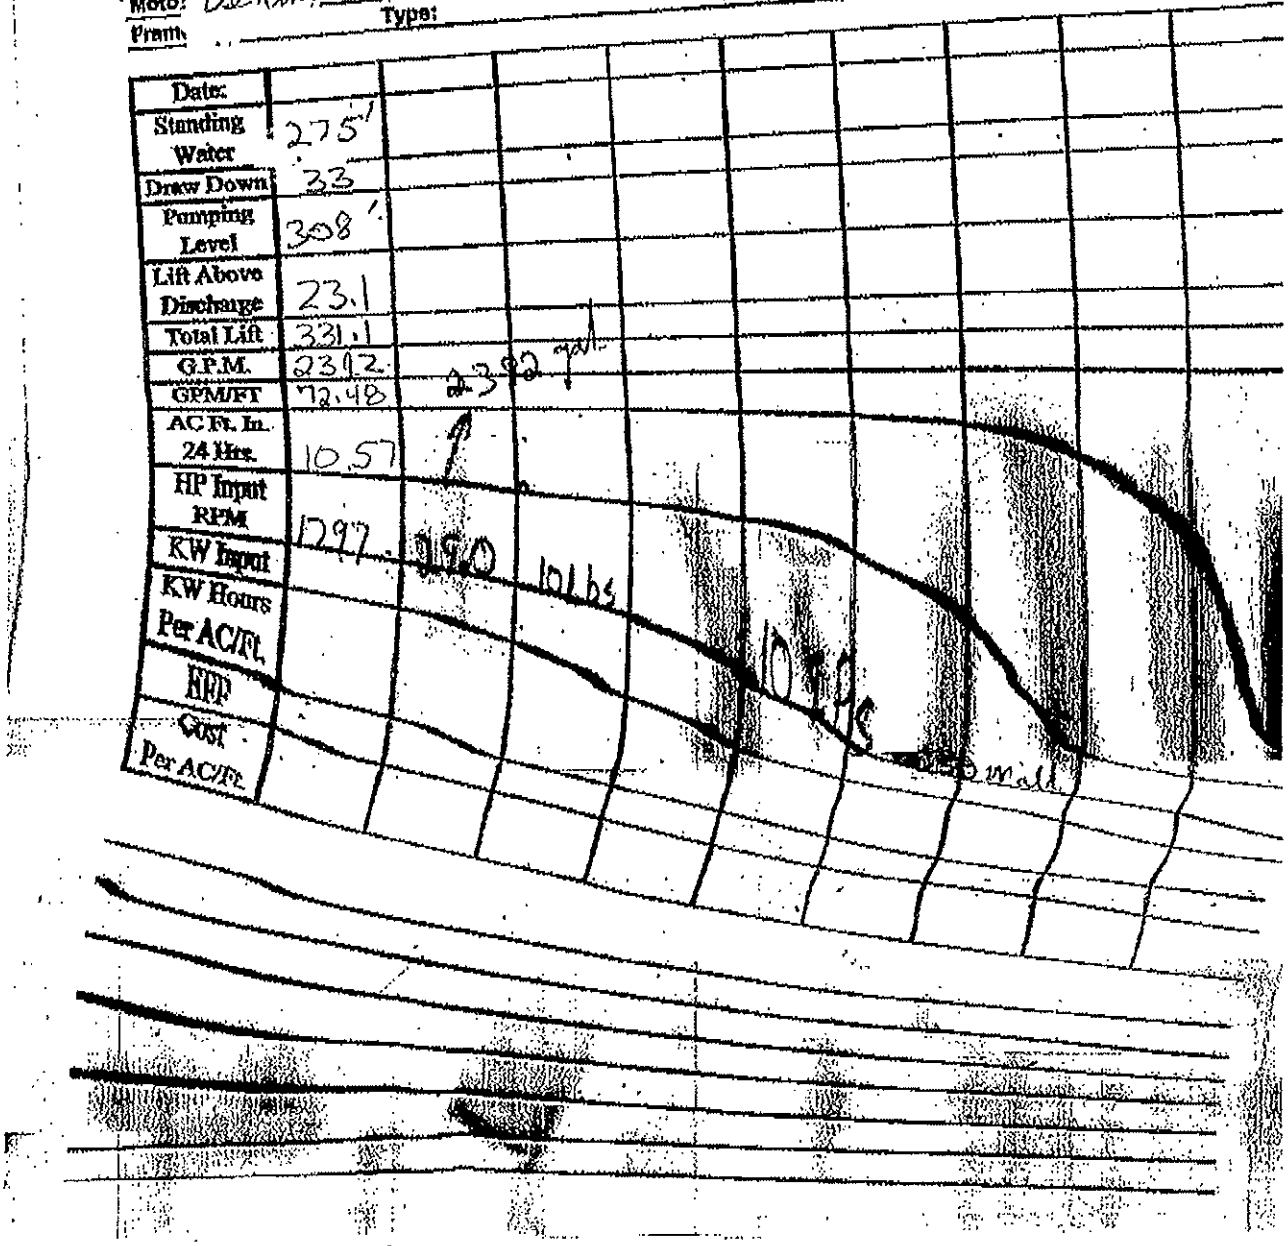

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Owl 14-3-S |

10-23-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Delco H.P. 300 HP Volts: R.P.M.: Serial #: C199010

Fram Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Can not get levels | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 115.5 | | | | | | | | |
| Total Lift | | 1163 gpm | | | | | | | |
| G.P.M. | 1155 | | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 5.10 | | | | Flow meter 1100 | | | | |
| HP Input RPM | 1792 | 140 | 592 lbs | | | 10" TFS @ 50 Well | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Avon 25-3 |
| | 10-1-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Doran H.P. 450 Volts: R.P.M.: Serial # C111072

Frame: Type: Pump: Type Oil Lube:

| Date: | | 10-1-08 | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 44 Lbs | 365' | 467' | air Line | | | | | |
| Draw Down | 23' | 23' | 480' | pump in hole | | | | | |
| Pumping Level | 34 LBS | 388 | | | | | | | |
| Lift Above Discharge | | 41.6 | | | | | | | |
| Total Lift | | 429.6 | | | | | | | |
| G.P.M. | | 2054 | | | flow meter | | | | |
| GPM/FT | | 89.3 | 2054 gal | | 2000 | | | | |
| AC Ft. In. 24 Hrs. | | 9.0 | | | | | | | |
| HP Input RPM | 1780 | 24.9 | 18 Lbs | 10" IPS | 250 Watch | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Avol 21-01 |

10-3-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. 450 HP Volts: R.P.M.: Serial # C111080

Frame: Type: Pump: Type Oil Lube:

| Date: | 10/3/08 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 334' | | | | | | | | |
| Draw Down | 17' | | | | | | | | |
| Pumping Level | 351 | | | | | | | | |
| Lift Above Discharge | 20' | | | | | | | | |
| Total Lift | 371 | | | | | | | | |
| G.P.M. | 2475 | 2475 | | | | | | | |
| GPM/FT | 145.6 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 10.9 | | | | | | | | |
| HP Input RPM | 1795 | 30.0 | 20 Lbs | | 10" Tbs .250 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Dach

Meter:

Legal:

Location:

12-12-08

Pump Data Installation Date:

Pump Setting :

Airline :

CT&S Size:

Bowls:

Well Depth:

Bleeds:

Perforations:

Moto: Devon H.P. 450 1+P Volts: R.P.M.: Serial C109 014

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 332' | | | | | | | | |
| Draw Down | 24 | | | | | | | | |
| Pumping Level | 356' | | | | | | | | |
| Lift Above Discharge | 97 | 73 | | | | | | | |
| Total Lift | 453 | 80 | | | | | | | |
| G.P.M. | 2013 | | | | | | | | |
| GPM/FT | 83.9 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 8.9 | | | | | 215 | | | |
| HP Input RPM | 1790 | 24.4 | 42 265 | | | 10" 250 Mill | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Hawiian 27-1 East |

9-30-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Deran H.P. G400 Volts: R.P.M.: Serial # G105053

Fram: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 334' | | | | | | | | |
| Draw Down | 30' | | | | | | | | |
| Pumping Level | 364' | | | | | | | | |
| Lift Above Discharge | 57.75 | | | | | | | | |
| Total Lift | 421.75 | | | | | | | | |
| G.P.M. | 2050 | | | | | | | | |
| GPM/FT | 68.3 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 7.7 | ~~[illegible]~~ | | Flow Meter 2050 gpm | | | | | |
| HP Input RPM | 1700 | 23.6 | 25 Lbs | | 10" FPS .250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Deed 13-3
Meter:
Legal:
Location:

12-16-08

Pump Data Installation Date:
Pump Setting :
Airline :
CT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Moto: Dresser H.P. 450 Volts: R.P.M.: Serial C111071
Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 324' | | | | | | | | |
| Draw Down | 50 | | | | | | | | |
| Pumping Level | 324' | | | | | | | | |
| Lift Above Discharge | 30' | | | | | | | | |
| Total Lift | 354 | | | | | | | | |
| G.P.M. | 202.1 | 202 | | | | | | | |
| GPM/FT | 40.42 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 8.9 | | | | | | | | |
| HP Input RPM | 1800 | 1795 | 13 235 | 10' | EPS | 260 Mill. | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Mann 22-2 W |

10-24-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Del Rom H.P. 300 HP Volts: R.P.M.: Serial # B901032

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 282' | | | | | | | | |
| Draw Down | 37 | | | | | | | | |
| Pumping Level | 319' | | | | | | | | |
| Lift Above Discharge | 20.79 | | | | | | | | |
| Total Lift | 339.79 | | | | | | | | |
| G.P.M. | 2302 | 2300 gpm | | | | | | | |
| GPM/FT | 62.22 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 10.17 | | | | Flow Meter 2300 gpm | | | | |
| HP Input RPM | 1800 | 227 | 3 Ph | | 10" TBS .295 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Minn - 23 - 4 |

10-23-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Da-Ron H.P. 450 HP Volts: R.P.M.: Serial #: C111081

Fram Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 300' | | | | | | | | |
| Draw Down | 35' | | | | | | | | |
| Pumping Level | 335' | | | | | | | | |
| Lift Above Discharge | 20.79 | | 4 gal | | | | | | |
| Total Lift | 355.79 | 80 | | | | | | | |
| G.P.M. | 1774 | | | | | | | | |
| GPM/FT | 50.69 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 7.84 | | Flow Meter 160 gal | | | | | | |
| HP Input RPM | 1797 | 21.5 | | 9 Lbs | 10" TPS 250 Watt | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | Mann 22-2 - F |
| Location: | |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: DeMan H.P. 300 Volts: R.P.M.: 1800 Serial # M20808

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 279' | | | | | | | | |
| Draw Down | 40 | | | | | | | | |
| Pumping Level | 319' | | | | | | | | |
| Lift Above Discharge | 92.4 | | | | | | | | |
| Total Lift | 411.4 | | | | | | | | |
| G.P.M. | 12.04 | | | | | | | | |
| GPM/FT | 30.1 | 120 gpm | | | 1478 1430 gpm | | | | |
| AC Ft. In. 24 Hrs. | 5.32 | 1' | | | 1' | | | | |
| HP Input RPM | 1800 | 14.6 | 402 lbs | 7 stage | 10" TPS .250 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BEF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | MW 22-4 |

10-3-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. 300 HP Volts: R.P.M.: Serial # G 410.111

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 300' | | | | | | | | |
| Draw Down | 55' | | | | | | | | |
| Pumping Level | 355 | | | | | | | | |
| Lift Above Discharge | 41.6 | | | | | | | | |
| Total Lift | 396.6 | | | | | | | | |
| G.P.M. | 2005 | | | | | | | | |
| GPM/FT | 36.45 | 2005 gal | | | | | | | |
| AC Ft. In. 24 Hrs. | 8.86 | | | Flow meter 2005 gal | | | | | |
| HP Input RPM | 1790 | 24.3 | 18 Lbs | | 10' | TB 250 volt | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Min 23-3 |

10-2-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. 300 Volts: R.P.M.: Serial # 6201046

Fram. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Can't get Levels | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 115.5 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 957 | | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.23 | 957 gal | | | Flow meter 1100 gal | | | | |
| HP Input RPM | 1800 | 11.6 | 50 Lbs | | 10" TPS | .250 wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | MiN. 22-3 |

10-3-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. 300 HP Volts: R.P.M.: Serial # C40 7084

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 301 | | | | | | | | |
| Draw Down | 29 | | | | | | | | |
| Pumping Level | 330 | | | | | | | | |
| Lift Above Discharge | 106.26 | | | | | | | | |
| Total Lift | 436 | | | | | | | | |
| G.P.M. | 1048 | | | | | | | | |
| GPM/FT | 36.14 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.63 | | | | Flow Meter 125 | | | | |
| HP Input RPM | 1780 | 12.7 | 46 Lbs | | | 10" IPS | | .250 Wall | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Main 21-3 East |

10-2-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: DeRan H.P. 300 HP Volts: 11 to 10 Ratio R.P.M.: Serial # B805 149

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 298' | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | RP. 11's | | | | | |
| Lift Above Discharge | Engine 1800 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | | 868 gpm | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | | | | | Flow Meter 1000 gal | | | | |
| HP Input RPM | Start Well 1634 | 10.4 | 42 lbs | | | 10" | LPS | .250 | well |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | 1800 Engine | | | | | | | | |
| RFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Main 21-3-W

Meter:

Legal:

Location:

Pump Data Installation Date:

Pump Setting :

Airline :

CT&S Size:

Bowls:

Well Depth:

Bank:

Perforations:

12-11-08

D & Ran

Moto: [redacted] H.P. 400 Volts: R.P.M.: Serial B710008

Fram. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 297' | | | | | | | | |
| Draw Down | 86 | | | | | | | | |
| Pumping Level | 383 | | | | | | | | |
| Lift Above Discharge | 32 | 212 | | | | | | | |
| Total Lift | 415 | | | | | | | | |
| G.P.M. | 2117 | 91 | | | | | | | |
| GPM/FT | 24.6 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 9.33 | 256 | 1425 | | | | 10" IPS 250 Wal | | |
| HP Input RPM | 1790 | | | | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

[redacted]

Felt Vibration on Pump Pad

Well: Parade 281 South
Meter:
Legal:
Location:

12-11-08

Pump Data Installation Date:
Pump Setting:
Airline:
CT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Motor: DeRan H.P. 350 Volts: R.P.M.: Serial 1290804
Fram: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 326' | | | | | | | | |
| Draw Down | 20' | | | | | | | | |
| Pumping Level | 346' | | | | | | | | |
| Lift Above Discharge | 23 | | | | | | | | |
| Total Lift | 369 | | | | | | | | |
| G.P.M. | 1551 | 1551 | | | | | | | |
| GPM/FT | 77.6 | ↑ | | | | | | | |
| AC Ft. In. 24 Hrs. | 6.85 | | | | | | | | |
| HP Input RPM | 1775 | 18.8 | 10 2bs | | 10" | IPS | 250 | Wall | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EIF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Parker 20-B-W

Meter:

Layout:

Location:

12-11-08

Pump Data Installation Date:

Pump Setting :

Airline :

CT&S Size:

Bowls:

Well Depth:

Blank:

Perforations:

Moto: DeRuss H.P. 360 Volts: R.P.M.: Serial C304165

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 32 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 1196 | 10 | | | | | | | |
| GPM/FT | | ↑ | | | | | | | |
| AC Ft. In. 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1793 | 1207 | 26 Lbs | | 10" IPS | .250 Watt. | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | 1793 | 1405 | 14 Lbs | | | | | | |
| EFF | | | ↓ | | | | | | |
| Cost Per AC/Ft. | | | 1196 | | | | | | |

This well need to be repaired

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Pardee 20-3 Middle 10-1-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Doran H.P. 300 Volts: R.P.M.: Serial # B903114

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 316' | | | | | | | | |
| Draw Down | 30' | | | | | | | | |
| Pumping Level | 346' | | | | | | | | |
| Lift Above Discharge | 99.3 | | | | | | | | |
| Total Lift | 445.3 | | | | | | | | |
| G.P.M. | 1098 | | | | | | | | |
| GPM/FT | 36.6 | | 1098 gal | | | | | | |
| AC Ft. In. 24 Hrs. | 4.8 | 9 | | 3600 meter 100 gal | | | | | |
| HP Input RPM | 1770 | 133 | 43 LBS | | 10" IPS | .250 wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | [redacted] S |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Parker - 20-40

10-23-08

Moto: Delran H.P. 300 HP Volts: R.P.M.: Serial # B 908 081

Fram Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Can't get level | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 36.9 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 1724 | 1724 gal | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 7.62 | | | | Flow Meter | | | | |
| HP Input RPM | 1800 | 20.9 | 16 Lbs | 1800 | 10" IPS | .250 Wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Paradee 204 N-E |

9-29-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. 350 Volts: R.P.M.: Serial # C407.086

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 323' | | | | | | | | |
| Draw Down | 49 | | | | | | | | |
| Pumping Level | 372' | | | | | | | | |
| Lift Above Discharge | 161.7 | | | | | | | | |
| Total Lift | 533.7 | | | | | | | | |
| G.P.M. | 1477 | | | | | | | | |
| GPM/FT | 30 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 5.5 | 1477 gal ↑ | | Flow Meter 1300 | | | | | |
| HP Input RPM | 1750 | 17.9 | 70 LBS | | 10" IPS 250 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Parole 28-3
Meter:
Legal:
Location:

Pump Data Installation Date:
Pump Setting :
Airline :
CT&S Size:
Bowls:
Well Depth:
Stock:
Perforations:

12-11-08

Moto: DeRan H.P. 200 H.P Volts: R.P.M.: Serial B912065
Prem. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 326' | | | | | | | | |
| Draw Down | 13 | | | | | | | | |
| Pumping Level | 339' | | | | | | | | |
| Lift Above Discharge | 34.7 | | | | | | | | |
| Total Lift | 373.7 | | | | | | | | |
| G.P.M. | 1097 | 1097 | | | | | | | |
| GPM/FT | 84.4 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.85 | 1' | | 1 flow 1100 gpm | | | | | |
| HP Input RPM | 1775 | 13.3 | 15 lbs | | 10" TPS | | .250 VM dll | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Parcel 30-3 |

10-1-09

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Dellan H.P. 200 Volts: R.P.M.: Serial # 13212099

Fram. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Cant not get to it | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | | 825 gpm | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | | | | | Flow Meter 6000 gpm | | | | |
| HP Input RPM | 1600 | 10.0 | 45 Lbs | | | 10" T.P.S. 250 Well | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BEP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Pardee 28-1 N |
| | 10-2-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Derun H.P. 350 Volts: R.P.M.: Serial # B910027

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 332' | | | | | | | | |
| Draw Down | 19' | | | | | | | | |
| Pumping Level | 351 | | | | | | | | |
| Lift Above Discharge | 32.34 | | | | | | | | |
| Total Lift | 383.34 | | | | | | | | |
| G.P.M. | ~~Hor 42~~ | 1642 | 1642 gpm | | | | | | |
| GPM/FT | 86.4 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 6 | 87 | | Flow meter 1900 gpm | | | | | |
| HP Input RPM | 1780 | 19.9 | 14 LBS | | 10" IPS | .250 wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Plant

Motor:

Legal:

Location:

Pump Data Installation Date:

Pump Setting :

Airline :

CT&S Size:

Bowls:

Well Depth:

Bowls:

Perforations:

Motor: DeRan H.P. 320 HP Volts: R.P.M.: Serial C112039

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 312 | | | | | | | | |
| Draw Down | 13 | | | | | | | | |
| Pumping Level | 325 | | | | | | | | |
| Lift Above Discharge | 69 | | | | | | | | |
| Total Lift | 394 | 8 1 Hour | | | | | | | |
| G.P.M. | 875 | | | | | | | | |
| GPM/FT | 6.73 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 3.9 | | | | | | | | |
| HP Input RPM | 1650 | 10.6 | 30 250 | Low Water 900 | | 10" T.P.S. 250 Well. | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| RFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

at 1780 Pump air

1680 - " "

1550 - OK

Well is old

This is not a good test at 1680

at 1500 - 1660 - OK

| | |
|---|---|
| Well: | Rowan 2-6 |
| Motor: | |
| Legal: | |
| Location: | |

11-13-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | BF25A-722 BEN |

Motor: Emerson H.P. 150 H.P Volts: 480 R.P.M.: 1785 Serial #: H0150.V25
From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 249' | | | | | | | | |
| Draw Down | 70' | | | | | | | | |
| Pumping Level | 319' | | | | | | | | |
| Lift Above Discharge | 46.2 | | | | | | | | |
| Total Lift | 365.2 | | | | | | | | |
| G.P.M. | 849 | 849 gpm | | | | | | | |
| GPM/FT | 12.13 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 3.75 | 1 | | | | | | | |
| HP Input RPM | 1785 | 10.3 | 29 lbs | 10" VPS 250 Mall | | | | | |
| KW Input | 112 | | | | | | | | |
| KW Hours Per AC/Ft. | 716.8 | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | 89.60 | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Rowan 2-2-N |
| | 7-23-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Emerson H.P. 125 Volts: R.P.M.: Serial #:

Fram. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 256' | | | | | | | | |
| Draw Down | 32 | | | | | | | | |
| Pumping Level | 288' | | | | | | | | |
| Lift Above Discharge | 152.5 | | | | | | | | |
| Total Lift | 440.5 | | | | | | | | |
| G.P.M. | 577 | | | | | | | | |
| GPM/FT | 1.3 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 2.5 | 577 gal. 4 | | Flow Meter 600 | | | | | |
| HP Input RPM | 1800 | 7.0 | 66.6 LBS | 10" EBS | 1250 wall | | | | |
| KW Input | 93 | | | | | | | | |
| KW Hours Per AC/Ft. | 892.8 | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | 111.6 | | | | | | | | |

Well: Bowen 2-4
Meter:
Legal:
Location:

12-8-08

Pump Data Installation Date:
Pump Setting:
Airline:
CTAS Site:
Bowls:
Well Depth:
Blank:
Perforations:

Motor: Emerson H.P. 250 HP Volts: 480V R.P.M.: 1780 Serial: H250V2S2L#
Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | | | | | | | | | |
| Draw Down | Could not reach levels | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 35' | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 1023 | 1023 gpm | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.5 | ↑ | | 1 Gear Motor to 30 | | | | | |
| HP Input RPM | 1780 | 12.42 | 15 hrs | | | 10" CPS 250 Watt | | | |
| KW Input | 186.5 | | | | | | | | |
| KW Hours Per AC/Ft. | 994.7 | | | | | | | | |
| HIF | | | | | | | | | |
| Cost Per AC/Ft. | 124.33 | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | 2-1 Rowan |

7-24-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Emerson H.P. 125 Volts: 460 R.P.M.: 1800 Serial # 4118F71H

Fram: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Can't get Levels | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 138.6 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 988 | | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.37 | 988 gal ↑ | | Flow meter 900 gal | | | | | |
| HP Input RPM | 1800 | 18.5 | 60 Lbs | 8" Dis | .250 | | | | |
| KW Input | 93 | | | | | | | | |
| KW Hours Per AC/Ft. | 510.75 | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | 63.84 | | | | | | | | |

Well: S&P 35-1
Meter:
Legal:
Location:

12-8-08

Pump Data Installation Date:
Pump Setting :
Airline :
GT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Moto: Emerson H.P. 125 HP Volts: 460 V R.P.M.: 1785 Serial: H0125Y2522
From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 169' | | | | | | | | |
| Draw Down | 42 | | | | | | | | |
| Pumping Level | 211' | | | | | | | | |
| Lift Above Discharge | 139 | 6" | | | | | | | |
| Total Lift | 350 | | | | | | | | |
| G.P.M. | 614 | | | | | | | | |
| GPM/FT | 14.74 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 2.74 | 2.5 | 60 | 25 | | 10" VPS 250 HP | | | |
| HP Input RPM | 1785 | | | | | | | | |
| KW Input | 93.25 | | | | | | | | |
| KW Hours Per AC/Ft. | 816.8 | | | | | | | | |
| HFF | | | | | | | | | |
| Cost Per AC/Ft. | 102 | | | | | | | | |

Well: SAP 26-3
Meter:
Legal:
Location: MOT 00059

1-7-09

Pump Data Installation Date:
Pump Setting:
Airline:
CT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Moto: Emerson H.P. 2.50 HP Volts: 460 R.P.M.: 1740 Serial
Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 207.9 | | | | | | | | |
| Total Lift | | | 1353 | | | | | | |
| G.P.M. | 1353 | | | | | 1304 | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 6.0 | | | Flow meter | | | 10" TPS .250 Wall | | |
| HP Input RPM | 1280 | 16.4 | 90 lbs | | | | | | |
| KW Input | 1816.5 | | | | | | | | |
| KW Hours Per AC/Ft. | 746 | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | 93.25 | | | | | | | | |

313 amp

Motor Rated amp 2.83 amp

Well: SVP 36-4-3

Meter:

Legal:

Location:

12-10-08

Pump Data Installation Date:

Pump Setting :

Airline :

CTAS Size:

Bowls:

Well Depth:

Blank:

Perforations:

Moto: Emerson H.P. 125 Volts: R.P.M.: 1785 Serial 1012SV2854X

Fram: Type: Pump: Type Oil Lube: 6212-J

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 69 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 500 | | | flow meter 500 gpm | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 2.2 | 412 gpm | | | | | | | |
| HP Input RPM | 1785 | 5.0 | 30 265 | 10" LPS 2500 Wdl. | | | | | |
| KW Input | 93 | | | | | | | | |
| KW Hours Per AC/Ft. | 1014 | | | | | | | | |
| EFF | - | | | | | | | | |
| Cost Per AC/Ft. | 126.8 | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | |

Testo

10-23-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor Johnson H.P. 425 HP Volts: R.P.M.: Serial # 168504

Fram Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 273' | | | | | | | | |
| Draw Down | 44 | | | | | | | | |
| Pumping Level | 317' | | | | | | | | |
| Lift Above Discharge | 23.1 | | | | | | | | |
| Total Lift | ~~2298~~ | 36.1 | | | | | | | |
| G.P.M. | 2298 | 98 | | | | | | | |
| GPM/FT | 52.2 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 10.15 | | | | | | | | |
| HP Input RPM | 1800 | 19.5 | 10 2bs | 21-00-22-00 | 12" TPS 250 Well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Bushniel 10-3 |

9-30-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. G 200B Volts: R.P.M.: Serial # B8 10090

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Can Not get | | | | | | | | |
| Draw Down | Levels | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 87.78 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 1204 | | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | 5.32 | 1204 gal | | | | | | | |
| HP Input RPM | 1800 | 14.6 | 3.8' | 10" IBS | .250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Bleshniel 10-4 |

9-30-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Johnson H.P. 425 HP Volts: R.P.M.: Serial #: 168500

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 300' | | | | | | | | |
| Draw Down | 21' | | | | | | | | |
| Pumping Level | 321' | | | | | | | | |
| Lift Above Discharge | 64.68 | | | | | | | | |
| Total Lift | 385.7 | | | | | | | | |
| G.P.M. | 2260 | | | | | | | | |
| GPM/FT | 167.6 | 2260 gal | | | | | | | |
| AC Ft. In. 24 Hrs. | 10 | ↑ | | | Flow Meter 2200 gal | | | | |
| HP Input RPM | 1775 | 27.4 | 28 LBS | | 10" TPS | .250 wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Hawiian — West |

9-30-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Johnson H.P. 500 Volts: R.P.M.: Serial # 66.5595

Fram: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 338' | | | | | | | | |
| Draw Down | 24 | | | | | | | | |
| Pumping Level | 362 | | | | | | | | |
| Lift Above Discharge | 101.64 ~~362~~ | | | | | | | | |
| Total Lift | 463.64 | | | | | | | | |
| G.P.M. | 1800 | | | | | | | | |
| GPM/FT | 75 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 7.79 | 1626 gal | | Flow meter 1800 | | | | | |
| HP Input RPM | 1760 | ↑ 19.7 | 44 Lbs | | 10" TP | .250 | Wall | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Pardee 20-4 East |

9-29-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: JOHNSON H.P. 350 Volts: R.P.M.: Serial # 166047

Fram Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 329' | | | | | | | | |
| Draw Down | 78' | | | | | | | | |
| Pumping Level | 407' | | | | | | | | |
| Lift Above Discharge | 92.4 | | | | | | | | |
| Total Lift | 499.4 | | | | | | | | |
| G.P.M. | 1031 | | | | | | | | |
| GPM/FT | 13.2 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.6 | | | Main Meter 1050986 | | | | | |
| HP Input RPM | 1800 | 12.5 | 40 Lbs | | 10" TRS, 250 Walk | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Pardee 20-3-8-E |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Johnson H.P. 350 Volts: R.P.M.: Serial #: 166048

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 60 LBS | 323 | | | | | | | |
| Draw Down | 22 | 51 | | | | | | | |
| Pumping Level | 38 LBS | 374 | | | | | | | |
| Lift Above Discharge | 36.96 | 36.9 | | | | | | | |
| Total Lift | | 410.9 | | | | | | | |
| G.P.M. | | 2162 | | | | | | | |
| GPM/FT | 42.4 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 9.5 | 2162 gpm | | Flow Meter 1800 | | | | | |
| HP Input RPM | 1775 | 26.2 | 16 lbs | | 10" TBS, 250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Anderson North

Meter:

Legal:

Location:

Pump Data Installation Date:

Pump Setting :

Airline :

CT&S Size:

Bowls:

Well Depth:

Blank:

Perforations:

12-9-08

Moto: Johnson H.P. 350 Volts: R.P.M.: Serial 167344

Fram Type: Pump: Type Oil Lube:

| Date: | 1-3-4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | ~~2~~ | | | | | | | | |
| Draw Down | 49' | | | | | | | | |
| Pumping Level | 183' | | | | | | | | |
| Lift Above Discharge | 71.6 | | | | | | | | |
| Total Lift | 254.6 | | | | | | | | |
| G.P.M. | 2200 | | | | | | | | |
| GPM/FT | 44.9 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 9.7 | | | | | | | | |
| HP Input RPM | 1800 | ~~2~~ 2500 | 31 lbs | | 10" IPS .250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

flow meter 2200 gpm

Well: Anderson South

Meter:

Legal:

Location:

12-9-08

Pump Data Installation Date:

Pump Setting :

Airline :

CT&S Size:

Bowls:

Well Depth:

Blank:

Perforations:

Moto: Johnson H.P. 350 Volts: R.P.M.: Serial 169342

Front: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 133' | | | | | | | | |
| Draw Down | 63 | | | | | | | | |
| Pumping Level | 196' | | | | | | | | |
| Lift Above Discharge | ~~210~~ 115 | | | | | | | | |
| Total Lift | 311 | | | | | | | | |
| G.P.M. | 1980 | 1980 | | | | | | | |
| GPM/FT | 31.43 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 8.75 | | | | plus Mtr 1700 | | | | |
| HP Input RPM | 1787 | 24.0 | 50# | | | 10" IPS | 250 roll | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

2

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Back 40 |

9-26-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran. H.P. 300 Volts: R.P.M.: Serial # B609034

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 172' | | | | | | | | |
| Draw Down | 20' | | | | | | | | |
| Pumping Level | 192' | | | | | | | | |
| Lift Above Discharge | 87.8 | | | | | | | | |
| Total Lift | 279.8 | | | | | | | | |
| G.P.M. | 1527 | | | | | | | | |
| GPM/FT | 76.3 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 6.75 | 1526 gpm | | Haw Meter 1750 | | | | | |
| HP Input RPM | 1770 | 18.5 | 38 Lbs | | 10" FPS .250 well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Big Field West 9-26-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Johnson H.P. 500 Volts: R.P.M.: Serial # 166011

Fram: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 168' | | | | | | | | |
| Draw Down | 34' | | | | | | | | |
| Pumping Level | 202' | | | | | | | | |
| Lift Above Discharge | 115.5 | | | | | | | | |
| Total Lift | 317.5 | | | | | | | | |
| G.P.M. | 1510 | | | | | | | | |
| GPM/FT | 44.4 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 6.167 | 1860 gal | | Flow meter 1500 gal | | | | | |
| HP Input RPM | 1775 | 183 | 50 Lbs | 10" TPS | 250 watt | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Big Field South
Meter:
Legal:
Location:

12-9-08

Pump Data Installation Date:
Pump Setting:
Airline:
CTAS Site:
Bowls:
Well Depth:
Bbls/c:
Perforations:

Motor: Johnson H.P. 500 Volts: R.P.M.: Serial 160010
Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 114 | | | | | | | | |
| Draw Down | 121 | | | | | | | | |
| Pumping Level | 230' | | | | | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | 369 | | | | | | | | |
| G.P.M. | 2269 | 2269 gpm | | | | | | | |
| GPM/FT | 18.75 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 18.75 | | | Polar Plate | | | | | |
| HP Input RPM | 1785 | 27.5 | 558 lbs | 2300 | 10" | TPS | 250 Y coll | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| RFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Brown east |
| | 9-22-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Deran H.P. 300 Volts: R.P.M.: Serial # 6201046

Fram: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 128' | | | | | | | | |
| Draw Down | 103' | | | | | | | | |
| Pumping Level | 231' | | | | | | | | |
| Lift Above Discharge | 143.22 | | | | | | | | |
| Total Lift | 374.22 | | | | | | | | |
| G.P.M. | 957 | | | | | | | | |
| GPM/FT | 9.3 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.2 | 957 gal | | Flow meter 900 | | | | | |
| HP Input RPM | 1780 | 16.9 | 62 LB | | 10" TRS | | 250 Wall | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Brown West well 9-22-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Motor: Doran H.P. 300 Volts: R.P.M.: Serial # 872103

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 136' | | | | | | | | |
| Draw Down | 80' | | | | | | | | |
| Pumping Level | 216' | | | | | | | | |
| Lift Above Discharge | 41.6 | | | | | | | | |
| Total Lift | 257.6 | | | | | | | | |
| G.P.M. | 742 | | | | | | | | |
| GPM/FT | 9.3 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 3.3 | 742 gal | | Flow Meter 900 gal | | | | | |
| HP Input RPM | 1760 | 9.0 | 18 LBS | | 10" Tds 250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | Turner South 9-22-08 |

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Johnson H.P. 500 Volts: R.P.M.: Serial # L6 9244

Fram Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 196' | | | | | | | | |
| Draw Down | 80' | | | | | | | | |
| Pumping Level | 276' | | | | | | | | |
| Lift Above Discharge | 64.7 | | | | | | | | |
| Total Lift | 340.68 | | | | | | | | |
| G.P.M. | 2475 | | | | | | | | |
| GPM/FT | 30.9 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 10.9 | 2473 rpms ↑ | | Flow Meter 2750 gal | | | | | |
| HP Input RPM | 1780 | 30.0 | 28 Lbs | | 10" EPS 250 Well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

| | |
|---|---|
| Well: | |
| Meter: | |
| Legal: | |
| Location: | yard well - North |

9-22-08

| | |
|---|---|
| Pump Data Installation Date: | |
| Pump Setting : | |
| Airline : | |
| CT&S Size: | |
| Bowls: | |
| Well Depth: | |
| Blank: | |
| Perforations: | |

Moto: Johnson H.P. 350 Volts: R.P.M.: Serial # 1664.84

Fram. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 162' | | | | | | | | |
| Draw Down | 37' | | | | | | | | |
| Pumping Level | 199' | | | | | | | | |
| Lift Above Discharge | 64.7 | | | | | | | | |
| Total Lift | 263.7 | | | | | | | | |
| G.P.M. | 2335 | | | | | | | | |
| GPM/FT | 63.1 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 10.3 | 2335 gpm | | | | | | | |
| HP Input RPM | 1775 | 28.3 | 28 Lbs | 10" IPS | 250 Well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: SHP 36-2
Meter:
Legal:
Location:

12-8-08

Pump Data Installation Date:
Pump Setting :
Airline :
CT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Moto: Emerson H.P. 200 HP Volts: 460V R.P.M.: Serial: M02820020577
From: Type: Pump: Type Oil Lube: ~ 90 W

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 197' | | | | | | | | |
| Draw Down | 81 | | | | | | | | |
| Pumping Level | 278' | | | | | | | | |
| Lift Above Discharge | 166 | | | | | | | | |
| Total Lift | 444 | | | | | | | | |
| G.P.M. | 1345 | 1345 | | | | | | | |
| GPM/FT | 16.6 | 13 | | | | | | | |
| AC Ft. In. 24 Hrs. | 5.9 | 1 | | | | | | | |
| HP Input RPM | 1780 | 1623 | 72 LBS | Flow Meter | | 10" DPS .250 Wall | | | |
| KW Input | 149 | | | | | | | | |
| KW Hours Per AC/Ft. | 606.10 | | | | | | | | |
| HFF | .75 | | | | | | | | |
| Cost Per AC/Ft. | 75.76 | | | | | | | | |

Well: 30-4-11
Meter:
Legal:
Location:

12-8-08

Pump Data Installation Date:
Pump Setting :
Airline :
GT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Motor: Emerson H.P. 200 HP Volts: 460 V R.P.M.: 1780 Serial: M38200206
Frame: Type: Pump: Type Oil Lube: ~~002R

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 196' | | | | | | | | |
| Draw Down | 83 | | | | | | | | |
| Pumping Level | 278' | | | | | | | | |
| Lift Above Discharge | 139 | | | | | | | | |
| Total Lift | 417 | | | | | | | | |
| G.P.M. | 1279 | 1279 Bad | | | | | | | |
| GPM/FT. | 15.4 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 5.165 | | | | | | | | |
| HP Input RPM | 1780 | 15.5 | 60 2 lbs | Flow meter Broke | | 10" TPS 250 Rail | | | |
| KW Input | 149 | | | | | | | | |
| KW Hours Per AC/Ft. | 632.9 | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | 79.11 | | | | | | | | |

Well: Aurelia 14-3 North

Meter:

Legal:

Location: 11-30-09

Pump Make Installation Date:

Pump Setting:

Motor:

CASE Size:

Gauge:

Well Depth:

Bowls:

Performance:

Make: Dresser HP: 400 HP Volts: RPM: Serial: C109015

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 265' | | | | | | | | |
| Draw Down | 30 | | | | | | | | |
| Pumping Level | 295 | | | | | | | | |
| Lift Above Discharge | 41.6" | | | | | | | | |
| Total Lift | 336.6 | | | | | | | | |
| G.P.M. | 2475 | | | | | | | | |
| GPM/FT | 82.5 | | | | | | | | |
| ACR. In 24 Hrs. | 10.9 | | | | | | | | |
| HP Input RPM | 1800 | 300 | 18 Lb | 10" PS | 1250 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per ACR. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per ACR. | | | | | | | | | |

awd

Well: 14-3-5

Meter:

Legal:

Location:

11-23-09

Pump Data Installation Date:

Pump Setting:

Airline:

CTRS Size:

Bowls:

Shaft Depth:

Stock:

Perforations:

Make: Berex H.P.: 300 Volts: R.P.M.: Serial: C109010

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 275 | | | | | | | | |
| Draw Down | 99 | | | | | | | | |
| Pumping Level | 374 | | | | | | | | |
| Lift Above Discharge | 138.6 | | | | Flow Meter 1000 gal | | | | |
| Total Lift | 512.6 | | | | | | | | |
| G.P.M. | 1064 | 1064 gal | | | | | | | |
| GPM/FT. | 10.7 | | | | | | | | |
| AC.FT. In 24 Hrs. | 4.7 | | | | | | | | |
| HP Input RPM | 1800 | 12.7 | 60 lbs | 10" IP | 250 Volt | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Root 26-3

Meter:

Legal:

Location:

11-23-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTRS Size:

Bowls:

Well Depth:

Bank:

Perforations:

Motor Deran H.P. 400HP Volts: R.P.M.: Serial C111072

Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 312 | | | | | | | | |
| Draw Down | 26 | | | | | | | | |
| Pumping Level | 338 | | | | | | | | |
| Lift Above Discharge | 53.13 | | | | | | | | |
| Total Lift | 391.13 | | | | | | | | |
| G.P.M. | 2064 | 2064 gal | | | | | | | |
| GPM/FT | 79.38 | | | | | | | | |
| AC Ft. In 24 Hrs. | 9.12 | | | | | | | | |
| HP Input RPM | 1900 | 2478 | 23 lbs | 10" | KW | 250 mall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Deer 21-1

Meter:

Legal:

Location:

12-1-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTAS Elev:

Packer:

Well Depth:

Casing:

Perforations:

Make: DeRan H.P.: 450 HP Volts: R.P.M.: Serial: C111080

Pump: Type Oil Lube:

From: Type:

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Date: | | | | | | | | | |
| Standing Water | 305' | | | | | | | | |
| Draw Down | 24 | | | | | | | | |
| Pumping Level | 329 | | | | | | | | |
| Lift Above Discharge | 23.1 | 2392 gpd | | | | | | | |
| Total Lift | 352.1 | | | | | | | | |
| G.P.M. | 2393 | | | | | | | | |
| GPM/FT | 99.7 | | | | | | | | |
| AC Ft. In 24 Hr. | 10.57 | | | | | | | | |
| HP Input RPM | 1800 | 29.0 | 10 Hrs | 10" IPS | .250 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Back well
Meter:
Legal:
Location:

11-20-09

Pump Data Installation Date:
Pump Setting :
Motor :
CT&S Size:
Bowls:
Well Depth:
Blank:
Perforations:

Motor Dean H.P. 450 HP Volts: R.P.M: Serial C109041
Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 336' | | | | | | | | |
| Draw Down | 26 | | | | | | | | |
| Pumping Level | 362 ( | | | | | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | 496 | | | | | | | | |
| G.P.M. | 1881 | 1881 gpm | | | | | | | |
| GPM/FT | 72.3 | / | | | | | | | |
| AC Ft. In. 24 Hrs. | 8.3 | | | | | | | | |
| HP Input RPM | 1800 | 228 | 58 lbs | 10" TBS | 250 | wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| RFP | - | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Dawson East 24-1

Meter:

Legal:

Location:

11-20-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTAS Size:

Bowls:

Well Depth:

Blank:

Perforations:

Motor Dean H.P. 400 AP Volts: R.P.M.: Serial: [illegible] C165053

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 325' | | | | | | | | |
| Draw Down | 49 | | | | | | | | |
| Pumping Level | 374' | | | | | | | | |
| Lift Above Discharge | 57.75 | | | | | | | | |
| Total Lift | 431.75 | | | | | | | | |
| G.P.M. | 2055 | 2055 gal | | | | | | | |
| GPM/FT | 42 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 9 | | | | | | | | |
| HP Input RPM | 1800 | 24.9 | 25 Lbs | 10" | TPS | .260 Wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Reid 13-3

Meter:

Legal:

Location:

11-23-09

Pump Motor Substitution Made:

Pump Setting:

Notes:

CTES Elec:

Hook:

Well Depth:

Mark:

Perforations:

Motor Doran H.P.: 450 HP Volts: R.P.M.: 1800 Serial: C111071

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 280 | | | | | | | | |
| Draw Down | 44 | | | | | | | | |
| Pumping Level | 324 | | | | | | | | |
| Lift Above Discharge | 50.82 | | | | | | | | |
| Total Lift | 424.82 | | | | | | | | |
| G.P.M. | 1708 | 1708 gal | | | | | | | |
| GPM/FT | 18 | | | | | | | | |
| AC Ft. In 24 Hrs. | 7.54 | | | | | | | | |
| HP Input RPM | 1800 | 2017 | 2226 | 10" TPS 250 Wall | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Mw 32-2 W

Meter:

Legal:

Location: on

11-30-09

Pump Make Installation Date:

Pump Setting:

Motor:

CTAS Size:

Remarks:

Well Depth:

Bowls:

Performance:

Make: Dresser H.P.: 300 HP Volts: Pump: R.P.M.: Type Oil Lube: Serial: B901032

From: Type:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 224' | | | | | | | | |
| Draw Down | 91 | | | | | | | | |
| Pumping Level | 315' | | | | | | | | |
| Lift Above Discharge | 34.6 | | | | | | | | |
| Total Lift | 349.6 | | | | | | | | |
| G.P.M. | 2170 | 2 mill gal | | | | | | | |
| GPM/FT | 53 | | | | | | | | |
| AC Ft. In 24 Hrs. | 9.59 | | | | | | | | |
| HP Input RPM | 1800 | 263 | 15 115 | 10" TPS | 250 mill | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well:
Owner:
Legal:
Location:

Pump Date Installed Date:
Pump Setting:
Motor:
Column Size:
Bowls:
Well Depth:
Check:
Performance:

Munn 23-4
11-23-09

Motor Doran H.P. 450 Volts: R.P.M.: Serial C111081
From Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 297' | | | | | | | | |
| Draw Down | 32 | | | | | | | | |
| Pumping Level | 329 | | | | | | | | |
| Lift Above Discharge | 34.7 | | | | | | | | |
| Total Lift | 363.7 | 1617 gal | | | | | | | |
| G.P.M. | 1617 | | | | | | | | |
| GPM/FT | 50.5 | | | | | | | | |
| AC Ft. In 24 Hrs. | 7.15 | | | | Flow Mtr 1450 gal. | | | | |
| HP Input RPM | 1200 | 18.6 | 1546 | 10" | EPS | 250 Hall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | - | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Mun - 22-2 - East

Meter:

Legal:

Location:

Pump Hole Installation Date:

Pump Setting:

Motor:

C.I.S.S. Size:

Packer:

Well Depth:

Mark:

Perforations:

Motor: DeLaval H.P.: 300 HP Volts: Pump: R.P.M.: 1800 Serial: Y288080

From: Type: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 276' | | | | | | | | |
| Pump Down | 38 | | | | | | | | |
| Pumping Level | 314' | | | | | | | | |
| I.H. Above Discharge | 115.5 | | | | | | | | |
| Total I.H. | 429.5 | | | | | | | | |
| G.P.M. | 1147 | 1148 GPM | | | | | | | |
| GPM/FT | 3.018 | | | | | | | | |
| AC.FT. In 24 Hrs. | 5 | | | | | | | | |
| HP Input RPM | 1800 | 13.9 | 5.0 2 Hz | 10" TPS 250 Well | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/FT. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/FT. | | | | | | | | | |

Well: Mapp-22-4

Make:

Legal:

Location:

Pump Data Installation Date:

Pump Setting:

Miline:

CTBS Size:

Bowls:

Well Depth:

Shaft:

Perforations:

12-2-09

Motor: DeMan H.P.: 300 IHP Volts: R.P.M.: Serial: 5410111

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 290' | | | | | | | | |
| Draw Down | 60 | | | | | | | | |
| Pumping Level | 350' | | | | | | | | |
| Lift Above Discharge | 32.34 | | | | | | | | |
| Total Lift | 382.34 | | | | | | | | |
| G.P.M. | 2063 | 2060 gal. | | | | | | | |
| GPM/FT | 34.4 | | | | | | | | |
| AC Ft. In 24 Hrs. | 9.12 | | | | | | | | |
| HP Input RPM | 1800 | 250 | 14 Lbs | 10" LPS .250 Wall | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Mer 23-3

Meter:

Legal:

Location:

11-30-09

Pump Bulb Installation Date:

Pump Setting:

Column:

CTRS Elec:

Bowls:

Well Depth:

Shaft:

Perforations:

Meter: Doran H.P.: 300 HP Volts: Pump: H.P.H.: Type Oil Lube: Serial: H201046

Press. Type:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 292' | | | | | | | | |
| Draw Down | 23 | | | | | | | | |
| Pumping Level | 315' | | | | Flow Meter 1050 gal. | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | 449 | | | | | | | | |
| G.P.M. | 1007 | 1008 gal | | | | | | | |
| GPMFT | 43.8 | ↗ | | | | | | | |
| ACFt. In 24 Hrs. | 4.45 | | | | | | | | |
| HP Input RPM | 1800 | 122 | 58 Amps | 10" ZPS | 250 Volts | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per ACFt. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per ACFt. | | | | | | | | | |

Well: Moon 22-3

Meter:

Light:

Location:

12-2-09

Pump Bulb Installation Date:

Pump Setting:

Motor:

CTRR Size:

Bowls:

Total Depth:

Remarks:

Performance:

Motor: Doran H.P.: 300AP Volts: R.P.M.: Serial: 407084

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 288 | | | | | | | | |
| Draw Down | 46 | | | | | | | | |
| Pumping Level | 334 | | | | | | | | |
| Lift Above Discharge | 64.68 | | | Flow Meter 1300 gal. | | | | | |
| Total Lift | 398.68 | | | | | | | | |
| G.P.M. | 1180 | 1180 | | | | | | | |
| GPM/FT. | 25.6 | | | | | | | | |
| AC.R. In 24 Hrs. | 5.2 | | | | | | | | |
| HP Input RPM | 1725 | 443 | 28.20 | 10" TPS 250 Roll | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per ACR. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per ACR. | | | | | | | | | |

Well: Pine Mesa 21-3 East

Meter:

Legal:

Location: on

12-1-09

Pump Bulk Installation Date:

Pump Setting:

Motor:

Column Size:

Bowls:

Last Repair:

Shaft:

Performance:

Motor Dr Pow  H.P.:  Volts:  R.P.M.: 1636  Serial: B806 149

From:  Type:  Pump:  Type Oil Lube:

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Date: | | | | | | | | | |
| Standing Water | Cut | | | | | | | | |
| Draw Down | Pulled | | | | | | | | |
| Pumping Level | down | | | | | | | | |
| Lft Above Discharge | 92.4 | | | | | | | | |
| Total Lft. | | | | | | | | | |
| G.P.M. | 916 | | | | | | | | |
| GPM/FT. | | | | | | | | | |
| AC Ft. in 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1800 | 1801 | 1801 | 10" Trs | 200 Well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

11 to 10 Year Head

Well: Mon-21-3-W

Meter:

Light:

Location:

12-1-09

Pump Info Installation Date:

Pump Setting:

Make:

C-Unit Size:

Bowls:

Well Depth:

Stock:

Performance:

Motor DeMar H.P. 400 HP Volts: Pump: R.P.M.: Type Oil Lube: Serial B710008

From: Type:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 294' | | | | | | | | |
| Draw Down | 84 | | | | | | | | |
| Pumping Level | 378' | | | | | | | | |
| Lift Above Discharge | 46.2 | | | | | | | | |
| Total Lift | 424.2 | 1923 gal. | | | | | | | |
| G.P.M. | 1923 | | | | | | | | |
| GPM/FT | 22.9 | | | | | | | | |
| ACFR. In 24 Hrs. | 8.5 | | | | | | | | |
| HP Input RPM | 1800 | 233 | 20 125 | 10" TPS | | #250 Mall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per ACFR. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per ACFR. | | | | | | | | | |

Parallel

Well: 28-1-5
Meter:
Legal:
Location:

Pump Data Installation Date:
Pump Setting:
Make:
CTRS Size:
Bowls:
Well Depth:
Stage:
Perforations:

11-18-09

Motor Doran H.P.: 350 Volts: R.P.M.: 1790 Serial B908084
Prem. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 328' | | | | | | | | |
| Draw Down | 21 | | | | | | | | |
| Pumping Level | 349' | | | | | | | | |
| Lift Above Discharge | 37 | | | Flow Meter 2000 | | | | | |
| Total Lift | 386 | | | | | | | | |
| G.P.M. | 1485 | 1485 | | | | | | | |
| GPM/FT | 70.7 | | | | | | | | |
| AC Ft. In 24 Hrs. | 6.6 | | | | | | | | |
| HP Input RPM | 1790 | 18 | 16 Lbs | 10" PSI | 200 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| IRF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Parade 30-3 WDT

Rate:

Legal:

Location:

12-3-09

Pump Rate Installation Date:

Pump Setting:

Motor:

CT&S Size:

Bowls:

Well Depth:

Stock:

Packer/Hose:

Motor De Lan H.P. 350 HP Volts: R.P.M.: Serial G304155

From: Type: Pump: Type Oil Lube:

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Date: | | | | | | | | | |
| Standing Water | 68 ft 30 | | | | | | | | |
| Draw Down | 103 | | | | | | | | |
| Pumping Level | 234 ft 13 | | | | 7 Lair Meter @ 1800 | | | | |
| Lift Above Discharge | 11.6 | 1486 gal. | | | | | | | |
| Total Lift | 424.6 | | | | | | | | |
| G.P.M. | 1485 | | | | | | | | |
| GPM/FT | 14.4 | | | | | | | | |
| AC Ft. In 24 Hrs. | 6.6 | | | | | | | | |
| HP Input RPM | 1800 | 18.0 | 62 lbs | 10" LPS 200 Wall | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Ponder 20-3 middle

Make:

Legal:

Location:

Pump Date Installation Date:

Pump Setting:

Miles:

CTRS Elev:

Remks:

Well Depth:

Elevn:

Perforations:

11-20-09

Motor Deran H.P.: 320 Volts: R.P.M.: Serial B903114

Pmps. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 0 | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 139 | | | | | | | | |
| Total Lift | — | | | | | | | | |
| G.P.M. | 1122 | | | | | | | | |
| GPM/FT. | | | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1800 | 1316 | 60 lbs | 10" IPS | 250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Parda 20-4 W
Meter:
Legal:
Location:

Pump Data Installation Date:
Pump Setting:
Make:
CTRS Size:
Bowls:
Well Depth:
Bowl:
Performance:

11-20-09

Motor Peerless R.P.: 200 HP Volts: R.P.M.: 1780 Serial: B908081
From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 21' | | | | | | | | |
| Draw Down | 100 feet | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 41.6 | | | | | | | | |
| Total Lift | — | | | | | | | | |
| G.P.M. | 1824 | | | | | | | | |
| GPM/FT. | | 1829 gpm | | | | | | | |
| AC Ft. In 24 Hrs. | | ↗ | | | | | | | |
| HP Input RPM | 1800 | 221 | 18 Lbs | 10' EPS | | .250 wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Parsley 2014 -N-R

Water:

Legal:

Location: m

Pump Data Installation Date:

Pump Setting:

Motor:

CTRS Size:

Remark:

Well Depth:

Remark:

Performance:

Motor Reran From: H.P.: 350 HP Volts: Type: Pump: R.P.M.: Type Oil Lube: Serial: C407086

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Can't get | | | | | | | | |
| Draw Down | get | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 97 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 1749 | 1749 | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1750 | 2102 | 42 lbs | 10" | TPS | 250 Watt | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Parker 28-3 well

State:

Legal:

Location:

11-18-09

Pump Data Satisfaction Date:

Pump Setting:

Mains:

CTRS Size:

Bowls:

Well Depth:

Shaft:

Performance:

Motor: Peerless H.P: 200 HP Volts: R.P.M.: Serial: B99 2065

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 329 | | | | | | | | |
| Draw Down | 13 | | | | | | | | |
| Pumping Level | 342 | | | | | | | | |
| Lift Above Discharge | 115.5 | | | | | | | | |
| Total Lift | 457.5 | 800 gal. | | | | | | | |
| G.P.M. | 800 | | | | | | | | |
| GPM/FT. | 61.5 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 3.5 | | | | | | | | |
| HP Input RPM | 225 | 9.7 | 50 Lbs | 10" CPS | | 200 Mall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Panda 20-3

Meter:

Legal:

Location:

11-20-09

Pump Data Installation Date:

Pump Setting:

Motor:

CT&S Size:

Bowls:

Well Depth:

Stock:

Performance:

Motor Deam H.P. 200HP Volts: R.P.M.: Serial B3712099

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 332' | | | | | | | | |
| Draw Down | 14 | | | | | | | | |
| Pumping Level | 346 | | | | | | | | |
| Lift Above Discharge | 140.91 | | | | | | | | |
| Total Lift | 486.91 | | | | | | | | |
| G.P.M. | 817 | | | | | | | | |
| GPM/FT | 58.4 | | | | | | | | |
| AC Ft. In 24 Hrs. | 3.6 | | | | | | | | |
| HP Input RPM | 1600 | 9.9 | 61 45 | 10" 12 S | 250 | Wall | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Pardee

Well: 28-1 North

Meter:

Legal:

Location:

11-18-09

Pump Data Installation Date:

Pump Setting:

Adder:

CTRS Size:

Bowls:

Well Depth:

Shaft:

Perforations:

Motor Deran H.P. 350 Volts: R.P.M.: Serial B910027

Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 320' | | | | | | | | |
| Draw Down | 52 | | | | | | | | |
| Pumping Level | 372' | | | | | | | | |
| Lift Above Discharge | 27.7 | | | | Flowmeter 2000gal. | | | | |
| Total Lift | 399.7 | | | | | | | | |
| G.P.M. | 1544 | 1500 gal. | | | | | | | |
| GPM/FT | 29.7 | | | | | | | | |
| AC Ft. In 24 Hrs. | 6.8 | ↑ | | | | | | | |
| HP Input RPM | 1900 | 1878 | D 4½ | 10" CPS | .250 wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Piano

Meter:

Legal:

Location:

Pump Sale Installation Date:

Pump Setting:

Make:

CTRS Size:

Bowls:

Well Depth:

Stack:

Perforations:

11-18-09

Motor Reliance H.P. 300 HP Volts: R.P.M.: Serial C112039

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 316 | | | | | | | | |
| Draw Down | 14 | | | | | | | | |
| Pumping Level | 330 | | | | | | | | |
| Lift Above Discharge | 138.6 | | | | | | | | |
| Total Lift | 468.6 | 8" | | | | Flo-Mate | 900 gpm | | |
| G.P.M. | 817 | | | | | | | | |
| GPM/FT | 58.4 | | | | | | | | |
| AC Ft. In 24 Hrs. | 3.6 | | | | | | | | |
| HP Input RPM | 1800 | 7.9 | 60 Lbs | 10 | PSI | 260 Wall. | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Carson 2-6

Meter:

Legal:

Location: 11-16-09

MOT 50

Pump Bulb Installation Date:

Pump Setting:

Tubing:

CTBS Size:

Bowls:

Well Depth:

Bowls:

Perforations:

Motor Carson H.P. 150 HP Volts: 480 R.P.M.: 1785 Serial: H0150V2SL6

From: Type: Pump: Type Oil Lube:

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Date: | 11-16-09 | | | | | | | | |
| Standing Water | 256' | | | | | | | | |
| Draw Down | 25' | | | | | | | | |
| Pumping Level | 331 | | | | | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | 465 | | | | | | | | |
| G.P.M. | 924 | | | | | | | | |
| GPM/FT | 12 | 924 gal | | | | | | | |
| AC Rt. In 24 Hrs. | 4.0 | 1 | | | | | | | |
| HP Input RPM | 1785 | 1162 | 578 Lbs | | 200 | 10' TPS | | | |
| KW Input | | | | | | | | | |
| KW Hours Per ACft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per ACft. | | | | | | | | | |

Well: Rawson 2-21
Meter:
Legal:
Location:

Mot 4
11-16-09

Pump Date Installation Date:
Pump Setting:
Motor:
CTRS Size:
Bowls:
Well Depth:
Casing:
Perforations:

Motor: Emerson H.P.: 10 HP Volts: 460 R.P.M.: 1785 Serial: H0125252C
From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 219 | | | | | | | | |
| Draw Down | 20 | | | | | | | | |
| Pumping Level | 239' | | | | | | | | |
| Lift Above Discharge | 155 | | | | | | | | |
| Total Lift | 394 | 407 | | | | | | | |
| G.P.M. | 627 | | | | | | | | |
| GPM/FT | 31.4 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 2.8 ~~1955~~ | 2.6 | 62 2HP | | 250 MIL | 10" DPS | | | |
| HP Input RPM | 1785 | | | | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Power 2-4
Meter:
Legal: mat 5-1
Location:

11-1609

Pump Data Installation Date:
Pump Setting:
Adline:
CTRS Size:
Bowls:
Shaft Depth:
Bbls:
Perforations:

Motor: Emerson H.P.: 250 Volts: 480 R.P.M.: 1780 Serial: 1200V25LH
From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | | 818 | | | | | | | |
| G.P.M. | 816 | 790 gal | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1780 | 9.9 | 582 | 250 | 10 | IPS | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Ramsdell Irrigation 2 of

Meter:

Legal:

Location:

Mot 48

11-16-09

Pump Date Installation Date:

Pump Setting:

Motor:

CTRS Size:

Bowls:

Well Depth:

Shaft:

Packer/Sleeve:

Make: Emerson H.P.: 125 Volts: 460 R.P.M.: 1800 Serial: A125V2526

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Off | | | | | | | | | |
| Draw Down | Off | | | | | | | | | |
| Pumping Level | 104 | | | | | | | | | |
| Lift Above Discharge | | | | | | | | | | |
| Total Lift | 1090 | | | | | | | | | |
| G.P.M. | | 1090 gpm | | | 1000 gpm | | | | | |
| GPM/FT | | | | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | | |
| HP Input RPM | 1800 | 20.4 | 45.2 | | 285 | 8" 125 | | | | |
| KW Input | | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | | |
| HPF | | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | | |

Well: SVP 35-1

Meter:

Legal:

Location:

mot 02

11-16-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTRS Size:

Bowls:

Well Depth:

Shaft:

Perforations:

Motor Emerson H.P.: 125 Volts: 480 R.P.M.: 1785 Serial: 1010/92512

Press. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 178' | | | | | | | | |
| Draw Down | 36 | | | | | | | | |
| Pumping Level | 214' | | | | | | | | |
| Lift Above Discharge | 18.48 | | | | | | | | |
| Total Lift | 232.48 | | | | | | | | |
| G.P.M. | 529 | | | | | | | | |
| GPM/FT | 14.4 | | 519 gpm | | | | | | |
| AC Ft. In 24 Hrs. | 2.3 | ↗ | | | | | | | |
| HP Input RPM | 1785 | 6.3 | 82 lbs | | 2550 | 8" LPS | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: S&P 35-3 well
Meter:
Legal:
Location:

12-3-09

Pump Date Installation Date:
Pump Setting:
Motor:
CTRS Size:
Electric:
Well Depth:
Electric:
Performance:

Motor Emerson H.P.: 250 HP Volts: ( R.P.M.: 1780 Serial No. 8200 2116-0091
Prem. Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 42 Ft | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | 0 | | | 1100 Flow Meter | | | | | |
| Lift Above Discharge | 46.2 | | | | | | | | |
| Total Lift | — | | | | | | | | |
| G.P.M. | 1163 | 1163 gpm | | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In. 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1780 | 14.11 | 20 135 | 10" CRS | 250 Well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: 35-4-3

Meter:

Legal:

Location: MOT 55

11-16-09

Pump Date Installation Date:

Pump Setting:

Motor:

CTRS Size:

Bowls:

Well Depth:

Bowls:

Perforations:

Motor Emerson H.P. 125 Volts: 480 R.P.M.: 1785 Serial 1005V2512

From Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 20 ft | | | | | | | | |
| Draw Down | 30 ft | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 116 | | | | | | | | |
| Total Lift | | | | | | | | | |
| G.P.M. | 602 | | 602 gal | | | | | | |
| GPM/FT | | | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | |
| HP Input RPM | 12 85 | 7.3 | 80 lbs | .250 wall | 10" EPS | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Testa

Meter:

Legal:

Location:

11-30-09

Pump Make Installation Date:

Pump Setting:

Motor:

Column Size:

Bowls:

Well Depth:

Motor:

Performance:

Motor: Johnson H.P. 425 HP Volts: R.P.M.: Serial 168504

Pump: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 282' | | | | | | | | |
| Draw Down | 30 | | | | | | | | |
| Pumping Level | 312' | | | | | | | | |
| Lift Above Discharge | 11.55 | | | | | | | | |
| Total Lift | 323.55 | 2710 gall | | | | | | | |
| G.P.M. | 2710 | | | | | | | | |
| GPM/FT. | 40.33 | | | | | | | | |
| AC Ft. In 24 Hrs. | 11.97 | | | | | | | | |
| HP Input RPM | 1770 | 23 | 5 LBS | 12" CPS .250 Wall | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Bushnell 10-3

Meter:

Login:

Location:

11-30-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTRS Size:

Starter:

Well Depth:

Bowls:

Packer/Liner:

Motor: Deron H.P.: 200 HP Volts: R.P.M.: Serial: 3810090

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | Dont | | | | | | | | |
| Draw Down | Dont | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 34.65 | | | | | | | | |
| Total Lift | — | | | | | | | | |
| G.P.M. | 1353 | 1353 | | | | | | | |
| GPM/FT. | | ↑ | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1790 | 16.4 | 15 LBS | | 10" PS | 250 Mill | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Bushmill 10-31

State:

Legal:

Location:

11-30-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTRS Size:

Bowls:

Well Depth:

Shaft:

Perforations:

Make: Johnson H.P.: 425 HP Volts: R.P.M.: Serial 168500

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 264' | | | | | | | | |
| Draw Down | 27 | | | | | | | | |
| Pumping Level | 291 | | | | | | | | |
| Lift Above Discharge | 37 | | | | | | | | |
| Total Lift | 328 | | | | | | | | |
| G.P.M. | 2475 | | | | | | | | |
| GPM/FT | 91.67 | | | | | | | | |
| AC Ft. In 24 Hrs. | 10.9 | | | | | | | | |
| HP Input RPM | 1790 | 30.0 | 16 1/3 | 10" | CPS | 250 Well | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BHP | - | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Burkhalter 15-2

Meter:

Legal:

Location:

11-30-09

Pump Rate Installation Date:

Pump Setting:

Motor:

CTRS Size:

Meter:

Well Depth:

Bleed:

Perforations:

Motor: Quan HP: 300 HP Volts: RPM: Serial: B609033

Frame: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 256' | | | | | | | | |
| Draw Down | 64 | | | | | | | | |
| Pumping Level | 320 | | | | | | | | |
| Lift Above Discharge | 129.4 | | | | | | | | |
| Total Lift | 449.4 | 1130 gpm | | | | | | | |
| G.P.M. | 1130 | | | | | | | | |
| GPM/FT | 17.7 | | | | | | | | |
| AC Ft. In 24 Hrs. | 5 | | | | | | | | |
| HP Input RPM | 1800 | 13.7 | 56 lbs | 10" PS | 250 volt | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Mayson West

Meter:

Legal:

Location:

Pump Data Installation Date:

Pump Setting:

Make:

GT&S Elev:

Bowls:

Well Depth:

Bowls:

Perforations:

11-20-09

Motor From: Johnson H.P.: 500 HP Volts: R.P.M.: 1800 Serial: 165593

Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 335' | | | | | | | | |
| Draw Down | 27 | | | | | | | | |
| Pumping Level | 362' | | | | | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | 492 | | | | | | | | |
| G.P.M. | 2294 | 2294 | | | | | | | |
| GPM/FT | 85 | | | | | | | | |
| AC Ft. In 24 Hrs. | 10.1 | | | | | | | | |
| HP Input RPM | 1800 | 22.9 | 58 Hz | 10" TBS 260 mil | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| BHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Powder 20-4 Prod

Meter:

Legal:

Location:

11-20-09

Pump Date Installed Date:

Pump Setting:

Motor:

CT&S Size:

Rods:

Well Depth:

Mesh:

Perforations:

Motor: Johnson HP: 300 HP Volts: RPM: Serial: 166047

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 310' | | | | | | | | |
| Draw Down | 67 | | | | | | | | |
| Pumping Level | 382' | | | | | | | | |
| Lift Above Discharge | 129.4 | 985 gal | | Flow meter 900 gal | | | | | |
| Total Lift | 511.4 | ↑ | | | | | | | |
| G.P.M. | ~~900~~ 685 | | | | | | | | |
| GPM/FT | 13.4 | | | | | | | | |
| AC Ft. In. 24-Hrs. | 3.9 ~~1900~~ | 10.7 | 5.6 lbs | | | | | | |
| HP Input RPM | 1800 | | | | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Purdy 20-3 S-K

Meter:

Legal:

Location:

11-20-09

Pump Data Installation Date:

Pump Setting:

Miller:

CTRS Size:

Bowls:

Well Depth:

Bbls:

Perforations:

Motor Johnson H.P. 350 HP Volts: R.P.M.: 1775 Serial 166048

Prime Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 323 62 lbs | | | | | | | | | |
| Draw Down | 52 | | | | | | | | | |
| Pumping Level | 375 402 lbs | | | | | | | | | |
| Lift Above Discharge | 55 | | | | | | | | | |
| Total Lift | 430 | | | | | | | | | |
| G.P.M. | 2071 | 2071 gal. | | | | | | | | |
| GPM/FT. | 40 | | | | | | | | | |
| AC Ft. In 24 Hrs. | 9.2 | | | | | | | | | |
| HP Input RPM | 1775 | 25.1 | 24 lbs | 10" TPS | | .250 Wall. | | | | |
| KW Input | | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | | |
| BPF | | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | | |

Well: Anderson North
Meter:
Legal:
Location: 11-17-09

Pump Date Installation Date:
Pump Setting:
Motor:
CTRS Size:
Bowls:
Well Depth:
Shaft:
Perforations:

Motor From Jakson H.P. 350 Volts: Pump: R.P.M.: 1780 Serial 169341
Type: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 147' | | | | | | | | |
| Draw Down | 63 | | | | | | | | |
| Pumping Level | 210 | | | | | | | | |
| Lift Above Discharge | 152.46 | | | | | | | | |
| Total Lift | 362.46 | | | | | | | | |
| G.P.M. | 1832 | 1831 gpm | | | | | | | |
| GPM/FT | 29 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 8 | | | | | | | | |
| HP Input RPM | 1780 | 222 | 662 hp | 10 PS | 250 | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Anderson South

Elev:

Legal:

Location:

11-18-09

Pump Data Installation Date:

Pump Setting:

Mainline:

GTRR Elev:

Elevation:

Well Depth:

Casing:

Perforations:

Motor Johnson H.P. 350 Hp Volts: R.P.M.: 1790 Serial 169342

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 129' | | | | | | | | |
| Draw Down | 29 | | | | | | | | |
| Pumping Level | 158' | | | | | | | | |
| Lift Above Discharge | 161.7 | | | | | | | | |
| Total Lift | 319.7 | 2236 gpm | | | | | | | |
| G.P.M. | 2236 | | | | | | | | |
| GPM/FT | 7.7 | | | | | | | | |
| AC Ft. In 24 Hrs. | 9.9 | | | | | | | | |
| HP Input RPM | 1790 | 2741 | 70.2% | 10" EPS | 250 gpm | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Beach 40

Meter:

Legal:

Location:

11-17-09

Pump Data Installation Date:

Pump Setting:

Adder:

CT&S Size:

Bowls:

Well Depth:

Bowls:

Perforations:

Motor Deere H.P. 300 AP Volts: R.P.M.: 1775 Serial B609034

Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 98' | | | | | | | | |
| Draw Down | 80 | | | | | | | | |
| Pumping Level | 178' | | | | | | | | |
| Lift Above Discharge | 106 | | | | | | | | |
| Total Lift | 284 | | 185 gal | | | | | | |
| G.P.M. | 1815 | 18 | | | | | | | |
| GPM/FT | 22.7 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 8 | | | | | | | | |
| HP Input RPM | 1775 | 22 | 96 lbs | 10" PS .200 wall | | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Big Field West

Meter:

Legal:

Location:

11-17-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTES Size:

Bowls:

Well Depth:

Shank:

Perforations:

Motor Johnson H.P. 500 HP Volts: R.P.M.: 1775 Serial 166011

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | ~~254~~ 254 | ~~258~~ 254 | | | | | | | |
| Draw Down | 31 | | | | | | | | |
| Pumping Level | 285 | 285 | | | | | | | |
| Lift Above Discharge | 152.46 | | | | | | | | |
| Total Lift | 437.46 | | | | | | | | |
| G.P.M. | 1419 | | 1419 gpm | | | | | | |
| GPM/FT | 45.8 | | | | | | | | |
| AC Ft. In 24 Hrs. | 6.3 | | | | | | | | |
| HP Input RPM | 1775 | 17.2 | 662 lbs | 10" LPS | 250 mill | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Big Field East

Meter:

Legal:

Location:

Pump Date Installation Date:

Pump Setting:

Notes:

CTES Elev:

Basin:

Well Depth:

Elevation:

11-17-09

Motor From: Johnson H.P. 600 HP Volts: Pump: R.P.M.: 1775 Serial 166008

Type: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | | | | | | | | | |
| Draw Down | | | | | | | | | |
| Pumping Level | | | | | | | | | |
| Lift Above Discharge | 145 | | | | | | | | |
| Total Lift | | | 1452 ft. | | | | | | |
| G.P.M. | 1452 | | | | | | | | |
| GPM/FT. | | | | | | | | | |
| AC Ft. In 24 Hrs. | | | | | | | | | |
| HP Input RPM | 1775 | 17.6 | 6325 | 10 FPS | .250 Well | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Big Field South
Meter:
Legal:
Location:

11-17-09

Pump Date Installation Date:
Pump Setting:
Adder:
CT&S Size:
Bowls:
Well Depth:
Stock:
Perforations:

Motor: Johnson H.P. 500HP Volts: R.P.M.: 1225 Serial 166010
Pump: Type Oil Lube:
Type:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 135' | | | | | | | | |
| Draw Down | 106 | | | | | | | | |
| Pumping Level | 241' | | | | | | | | |
| Lift Above Discharge | 143 | | | | | | | | |
| Total Lift | 384 | | | | | | | | |
| G.P.M. | 2475 | Flowmeter 2500 | | | | | | | |
| GPM/FT | 23.3 | | | | | | | | |
| AC Ft. In 24 Hrs. | 10.9 | | | | | | | | |
| HP Input RPM | 1225 | 307 | 62 Lbs | | 10"CPS | 260 Watts | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| RPF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Brown East

Motor:

Log#:

Location:

11-18-09

Pump Data Installation Date:

Pump Setting:

Make:

CTRS Size:

Bowls:

Well Depth:

Discs:

Performance:

Motor Doran H.P. 300 HP Volts: R.P.M.: Serial B201046

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 118' | | | | | | | | |
| Draw Down | 104 | | | | | | | | |
| Pumping Level | 222' | | | | | | | | |
| Lift Above Discharge | 139 | | | | | | | | |
| Total Lift | 361 | | | | | | | | |
| G.P.M. | 1023 | | 1023 gpm - Flow Meter 1000 gpm | | | | | | |
| GPM/FT | 4.8 | | | | | | | | |
| AC Ft. In 24 Hrs. | 4.5 | | | | | | | | |
| HP Input RPM | 1800 | 0.4 | 60 Lbs | 10" TBS | 200 volt | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Brown west

Motor:

Legal:

Location: on

11-18-09

Pump Data Installation Date:

Pump Setting :

Airline :

CTAS Size:

Bowls:

Well Depth:

Bowls:

Perforations:

Motor Devon H.P. 300 HP Volts: R.P.M.: Serial B712103

Frame Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 118' | | | | | | | | |
| Draw Down | 98 | | | | | | | | |
| Pumping Level | 216' | | | | | | | | |
| Lift Above Discharge | 139 | | | | | | | | |
| Total Lift | 355 | | | | | | | | |
| G.P.M. | 792 | | | | | | | | |
| GPM/FT | 8 | | 792 gpm | Flow Meter 800 gpm | | | | | |
| AC Ft. In. 24 Hrs. | 3.5 | | | | | | | | |
| HP Input RPM | 1800 | 9.6 | 602 lbs | 10" 2 PS | 250 Wall | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| IHP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Timms South

Meter:

Legal:

Location:

11-18-09

Pump Date Installed Date:

Pump Setting:

Adlen:

GTRS Size:

Bowls:

Total Depth:

Shaft:

Perforations:

Motor Johnson H.P. 500 HP Volts: R.P.M.: Serial 169244

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 157' | | | | | | | | |
| Draw Down | 78 | | | | | | | | |
| Pumping Level | 235' | | | | | | | | |
| Lift Above Discharge | 162 | | | | | | | | |
| Total Lift | 397 | | | | | | | | |
| G.P.M. | 2327 | | 2326 gpm | | | | | | |
| GPM/FT. | 29.8 | | | | | | | | |
| AC.Ft. In 24 Hrs. | 10.3 | | | | | | | | |
| HP Input RPM | 1780 | 28.2 | 702 lbs | 10" TRS | | 250 volt | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| RHP | - | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: Yard North
Meter:
Legal:
Location:

11-17-09

Pump Date Installation Date:
Pump Setting:
Airline:
CTRS Size:
Bowls:
Well Depth:
Shaft:
Perforations:

Motor: Johnson H.P.: 350 Volts: R.P.M.: 1775 Serial: 166494
From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 115 | | | | | | | | |
| Draw Down | 47' | | | | | | | | |
| Pumping Level | 162' | | | | | | | | |
| Lift Above Discharge | 34.7 | | | | | | | | |
| Total Lift | 196.7 | | | | | | | | |
| G.P.M. | 2475 | | | | | | | | |
| GPM/FT | 52.6 | | | | | | | | |
| AC Ft. In 24 Hrs. | 10.9 | 2475 | | | | | | | |
| HP Input RPM | 1775 | 304 | 1526 | | .250 | 10" EPS | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| HP | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: S+P 35-2

Meter:

Legal:

Location: MOP 53

11-16-09

Pump Data Installation Date:

Pump Setting:

Motor:

CTRS Size:

Bowls:

Well Depth:

Shaft:

Performance:

Motor Emerson H.P. 200 HP Volts: 480 R.P.M.: Serial No. 8200206?0

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 256' | | | | | | | | |
| Draw Down | 24 | | | | | | | | |
| Pumping Level | 280 | | | | | | | | |
| Lift Above Discharge | 143 | | | | | | | | |
| Total Lift | 423 | | | | | | | | |
| G.P.M. | 990 | | | | | | | | |
| GPM/FT | 41 | 99 | | | | | | | |
| AC Ft. In 24 Hrs. | 4.4 | 1 | | | | | | | |
| HP Input RPM | 1780 | 12.0 | 62 Lbs | 6200 | 10" EPS | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |

Well: SHP 35-4 N

Meter:

Legal:

Location: - MOT 56

11-16-09

Pump Data: Installation Date:

Pump Setting:

Miller:

CTRS Size:

Bowls:

Well Depth:

Bbls:

Perforations:

Motor: Emerson H.P.: 126 HP Volts: 480 R.P.M.: 1780 Serial: Mo2 8200 2019 0082

From: Type: Pump: Type Oil Lube:

| Date: | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Standing Water | 265' | | | | | | | | |
| Draw Down | 27 | | | | | | | | |
| Pumping Level | 282 | | | | | | | | |
| Lift Above Discharge | 134 | | | | | | | | |
| Total Lift | 416 | | | | | | | | |
| G.P.M. | 1058 | | 1056 gpm | | | | | | |
| GPM/FT. | 39.1 | | | | | | | | |
| AC Ft. In. 24 Hrs. | 4.7 | | | | | | | | |
| HP Input RPM | 1280 | 12.8 | 58.2 lbs | 250 | 10" PS | | | | |
| KW Input | | | | | | | | | |
| KW Hours Per AC/Ft. | | | | | | | | | |
| EFF | | | | | | | | | |
| Cost Per AC/Ft. | | | | | | | | | |